








Closure Strips

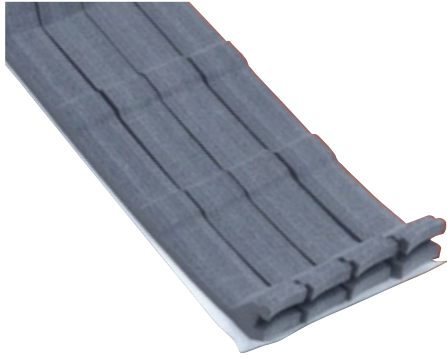

PANEL PROFILE	DESCRIPTION	PITCH OF CORR	WIDTH OF STRIP	HEIGHT OF CORR	LENGTH OF STRIP	PIECES PER CTN.	WEIGHT PER CTN.
	3/4" Ag Rib	9"	1"	3/4"	36"	100	6 LBS.
	R-Panel	12"	1"	1-1/4"	36"	100	6 LBS.
	U-Panel	6"	1"	3/4"	36"	100	6 LBS.
	Pro Panel II	9"	1"	5/8"	36"	100	6 LBS.
	2.67" x 7/8" Corrugated	2.67"	1"	7/8"	36"	100	6 LBS.

PERFORMANCE DATA

LAMINATE PHYSICAL PROPERTIES		TEST PROCEDURES	2 PCF
Tensile Strength (PSI)	Machine Direction	ASTM D-3575	60
	Cross Direction		39
Elongation %	Machine Direction	ASTM D-3575	124
	Cross Direction		88
Compression Resistance	(Deflection)	ASTM D-3575	
	(PSI 25% Compression)		5
	(PSI 50% Compression)		14
Compression Set (50%)	(% Original Thickness)	ASTM D-3575	28
Tear Resistance (PLI)	Machine Direction	ASTM D-3575	6
	Cross Direction		11
Shore Hardness	00 Scale	ASTM 2240	51
Thermal Stability (% Max.) (24 hour @ 158°F)	Machine Direction		-2.0
	Cross Machine		-1.0
Thermal Conductivity	(K Factor)	ASTM C177	.25
	(BTU in. /F Hr. °F)		
Water Absorption	(Lbs./Sq. Ft. Cut Surface)	ASTM D-1667	1.04
Working Temperature Range	(Degree F)		-110 to +200
Flammability		AVSS 302	Pass



Interlocking dovetails provide a secure end-to-end fit, eliminating any potential gaps



Pre-applied adhesive helps to keep closure in place before roof panel is fastened.

- Designed to close gaps in roof & sidewall applications. Material is pre-cut to conform to metal panel configurations.
- Applications include closing the openings at the ridge (peak of the building) or at the eave (gutter-line of a building).
- 2 lb. Density polyethylene foam is designed to withstand harsh weather elements including moisture & ultraviolet rays.
- Optional pre-applied adhesive helps to keep closure in place before roof panel is fastened.
- Interlocking dovetails provide a secure end-to-end fit, eliminating any potential gaps
- Other profiles are available. Call SEALTITE Customer Service for availability.



www.sealtite.com

6357 Reynolds Road
P.O. Box 4515, Tyler, Texas 75712
800-352-4864 • 800-352-3940 Fax
903-592-2826 • 903-592-1583 Fax

9950 Princeton Glendale Rd.
Cincinnati, OH 45246
800-944-8920 • 800-944-4183 Fax
513-874-5905 • 513-874-5903 Fax