

Grommet



PERFORMANCE DATA


- Grommet consists of 304 Stainless Steel machine screw, 304 Stainless Steel bonded washer, & internally threaded rubber sleeve with pre-assembled nut.
- As the fastener is tightened, the rubber sleeve expands to provide a gasketing effect on the bottom side of the pre-drilled hole.
- Applications include fastening fiberglass sheets together or other dissimilar materials that are prone to extensive expansion & contraction due to temperature changes.
- 316 Series Stainless Steel is available as an option.

MATERIAL & GROMMET DIAMETER	HAND STYLE AND LENGTH	BOX QTY.	WEIGHT LBS. PER 1000 PCS.
18-8 STAINLESS	(3/8") HH 5/16" AF 1"	2500	17.5
316 STAINLESS	(3/8") HH 5/16" AF 1"	2500	17.5

GROMMET SPECIFICATIONS				
SIZE	BODY LENGTH	NUT INSERT	DUROMETER (SLEEVE)	ULTIMATE TENSILE
3/8" x 1"	.812	10-12	60	80 LBS.

MACHINE SCREW SPECIFICATIONS							
SIZE	HEX SIZE	MATERIAL	BONDED WASHER	SLEEVE	NUT INSERT	REC. HOLE SIZE	GRIP RANGE
10-12 x 1-1/4"	5/16	302 HQ	304 SS/EPDM	EPDM	BRASS	.375	.312-.545

*Also available in 316 S/S

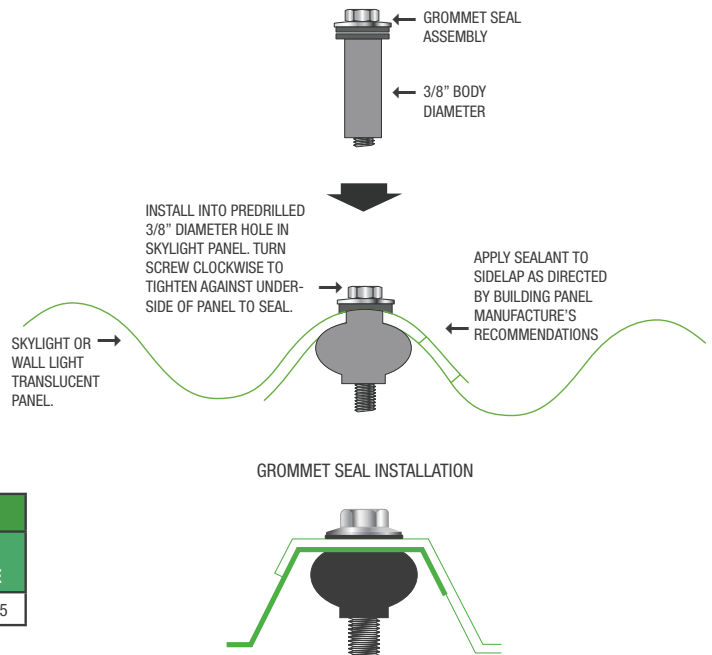

www.sealtite.com

6357 Reynolds Road
 P.O. Box 4515, Tyler, Texas 75712
 800-352-4864 • 800-352-3940 Fax
 903-592-2826 • 903-592-1583 Fax

9950 Princeton Glendale Rd.
 Cincinnati, OH 45246
 800-944-8920 • 800-944-4183 Fax
 513-874-5905 • 513-874-5903 Fax