

# MAGNETIC AND NON MAGNETIC SPRING RETAINER SOCKETS AND DRIVERS



## PERFORMANCE DATA



- 1/4", 5/16", 3/8" sizes are standard.
- Magnetic or Spring Retainer are both available
- Magnetic socket is designed with a high power magnet for a secure fit. Painted fasteners do not scratch or mar as easily
- Spring retainer socket is designed for use with all SEALTITE non-magnetic screws, especially the ZXL long-life family. The clip & ball bearing hold the screw securely in place during installation.

- Maximum torque transfer & positive tool engagement means easier drive installation with less pressure & slippage.
- Drivers are specifically designed to fit ECLIPSE WOODBINDER & STEELBINDER screws.

SIZE	TYPE	LENGTH
1/4"	Magnetic, Spring Retainer	2 9/16", 1 3/4"
5/16"	Magnetic, Spring Retainer	2 9/16"
3/8"	Magnetic, Spring Retainer	2 9/16"

SIZE	TYPE	LENGTH
T25W275	6 LOBE	2 3/4"
T30W275	6 LOBE	2 3/4"

**NOTES:** 1. A 1 3/4" short magnetic socket is also available.

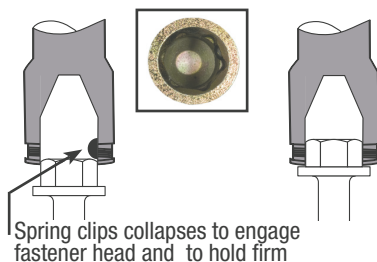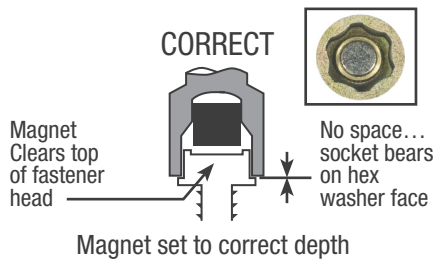

www.sealtite.com

6357 Reynolds Road  
 P.O. Box 4515, Tyler, Texas 75712  
 800-352-4864 • 800-352-3940 Fax  
 903-592-2826 • 903-592-1583 Fax

9950 Princeton Glendale Rd.  
 Cincinnati, OH 45246  
 800-944-8920 • 800-944-4183 Fax  
 513-874-5905 • 513-874-5903 Fax